


2018 LED CATALOGUE



NINGBO RUNWIN LIGHTING CO., LTD.
Add:3F, North Building, No.158 Dongyu Road,
Yinzhou District, Ningbo, China
Tel:+86-574-5666599
Fax:+86-574-88329069
E-mail:info@runwin.com
www.runwin.com



LED Outdoor Luminaires




IMAC PLUS I LED FLOODLIGHT

AC DRIVER | WARRANTY 2 YEARS | IP65 PLASTIC | CE RoHS

Features:

- High thermal conductive plastic and aluminum housing
- Ultra slim design to have elegant look.
- High quality reflector to achieve wide beam angle
- Reliable LED chip brand with high lumen efficiency
- Efficient led driver to achieve safe and guaranteed quality
- IP rating: IP65
- With easy and quick installation, used in wide applications like stadium, hotel, advertisement, etc.
- Long lifespan: 25000 hours
- CE, ROHS approval

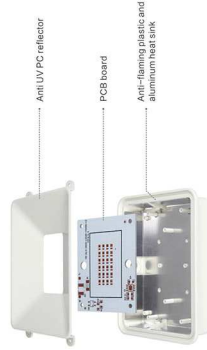

Technical Parameters:

Item No.	Voltage	Wattage	Luminous flux	CRI	Beam Angle	IP	PF	Product Size (L*W*H)
01FL-IMACP1-10W	AC200-265V	10W	800LM	>80	120°	65	0.9	122*92*21mm
01FL-IMACP1-20W	AC200-265V	20W	1600LM	>80	120°	65	0.9	150°116°36mm
01FL-IMACP1-30W	AC200-265V	30W	2700LM	>80	120°	65	0.9	170°130°36mm
01FL-IMACP1-50W	AC200-265V	50W	4500LM	>80	120°	65	0.9	230°170°36mm
01FL-IMACP1-70W	AC200-265V	70W	5950LM	>80	120°	65	0.9	300°200°36mm
01FL-IMACP1-100W	AC200-265V	100W	8500LM	>80	120°	65	0.9	390°290°36mm

LED Outdoor Luminaires




IMAC PLUS II LED FLOODLIGHT

AC DRIVER | WARRANTY 2 YEARS | IP65 PLASTIC | CE RoHS

Features:

- High thermal conductive plastic and aluminum housing
- Ultra slim design to have elegant look.
- High quality reflector to achieve wide beam angle
- Reliable LED chip brand with high lumen efficiency
- Efficient led driver to achieve safe and guaranteed quality
- IP rating: IP65
- With easy and quick installation, used in wide applications like stadium, hotel, advertisement, etc.
- Long lifespan: 25000 hours
- CE, ROHS approval



Technical Parameters:

Item No.	Voltage	Wattage	Luminous flux	CRI	Beam Angle	IP	PF	Product Size (L*W*H)
01FL-IMACP2-10W	AC200-265V	10W	750LM	>80	120°	65	0.9	95°90°25mm
01FL-IMACP2-20W	AC200-265V	20W	1600LM	>80	120°	65	0.9	150°116°36mm
01FL-IMACP2-30W	AC200-265V	30W	2400LM	>80	120°	65	0.9	170°130°36mm
01FL-IMACP2-50W	AC200-265V	50W	4000LM	>80	120°	65	0.9	230°170°36mm

IPAD LED FLOODLIGHT

LED Outdoor Luminaires

AC DRIVER | WARRANTY 2 YEARS | IP65 | ALU

CE ROHS

Features:

- Die cast aluminum housing
- Ultra slim design to have elegant look.
- High quality reflector to achieve wide beam angle
- Reliable LED chip brand with high lumen efficiency
- Efficient led driver to achieve safe and guaranteed quality
- IP rating: IP65
- With easy and quick installation, used in wide applications like stadium, hotel, advertisement, etc.
- Long lifespan: 25000 hours
- CE,ROHS approval



Technical Parameters:

Item No.	Voltage	Wattage	Luminous flux	CRI	Beam Angle	IP	PF	Product Size (L*W*H)
01FL-IPAD-10W	AC200-265V	10W	750LM	>80	120°	65	0.9	95*65*22mm
01FL-IPAD-20W	AC200-265V	20W	1500LM	>80	120°	65	0.9	125*88*24mm
01FL-IPAD-30W	AC200-265V	30W	2250LM	>80	120°	65	0.9	155*110*24mm
01FL-IPAD-50W	AC200-265V	50W	3750LM	>80	120°	65	0.9	200*142*24mm
01FL-IPAD-70W	AC200-265V	70W	5250LM	>80	120°	65	0.9	200*142*24mm
01FL-IPAD-100W	AC200-265V	100W	7500LM	>80	120°	65	0.9	275*188*35mm

S-LITE LED FLOODLIGHT

LED Outdoor Luminaires

AC DRIVER | WARRANTY 2 YEARS | IP65 | ALU

CE ROHS



01 IP 65 Waterproof block: Seal with rubber gasket, IP65, 300, 35mm, 4mm



02 Ultra slim design with elegant looking stainless steel screws




03 Full die cast aluminum housing for good heat dissipation



04 High brightness led chip to guarantee lumen output; High quality glue to avoid water vapor inside

Technical Parameters:

Item No.	Voltage	Wattage	Lumen	CRI	Beam angle	IP	PF	Product size (L*W*H)
01FL-SL-10W	AC 200-265V	10W	800LM	>80	120°	65	>0.9	103*83*24mm
01FL-SL-30W	AC 200-265V	30W	2400LM	>80	120°	65	>0.9	160*122*26mm
01FL-SL-50W	AC 200-265V	50W	4000LM	>80	120°	65	>0.9	206*160*33.5mm
01FL-SL-100W	AC 200-265V	100W	8000LM	>80	120°	65	>0.9	270*210*33.5mm
01FL-SL-200W	AC 200-265V	200W	16000LM	>80	120°	65	>0.9	380*280*43.5mm
01FL-SL-300W	AC 200-265V	300W	24000LM	>80	120°	65	>0.9	445*335*45mm

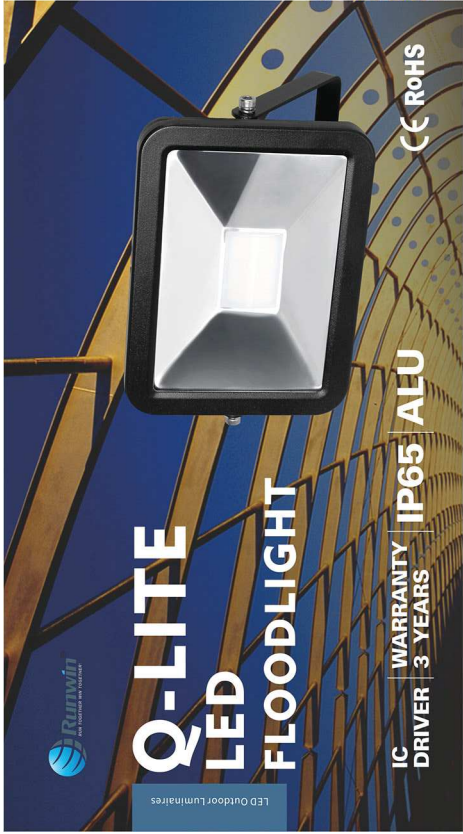

LED Outdoor Luminaires

Q-LITE
LED
FLOODLIGHT

IC | WARRANTY 3 YEARS | IP65 | ALU

CE ROHS

Features:


- Die cast aluminum housing
- Elegant and ultra slim design
- High quality reflector makes wide beam angle
- Reliable led chip with high lumen efficiency: >100lm/w
- Efficient led driver to achieve safe and guaranteed quality
- IP rating: IP65
- Suitable for project cases: stadium, hotel, warehouse, Etc.
- Long lifespan: 30000hours, 3 years warranty
- CE, ROHS approval



100LM/W

Technical Parameters:

Item No.	Voltage	Wattage	Luminous flux	CRI	Beam Angle	IP	PF	Product Size (L*W*H)
01FL-QI-10W	AC100-265V	10W	1000LM	>70	120°	65	0.5	150*105*30mm
01FL-QI-15W	AC100-265V	15W	1500LM	>70	120°	65	0.5	150*105*30mm
01FL-QI-20W	AC100-265V	20W	2000LM	>70	120°	65	0.5	210*148*35mm
01FL-QI-30W	AC100-265V	30W	3000LM	>70	120°	65	0.5	210*148*35mm
01FL-QI-50W	AC100-265V	50W	5000LM	>70	120°	65	0.5	310*220*40mm

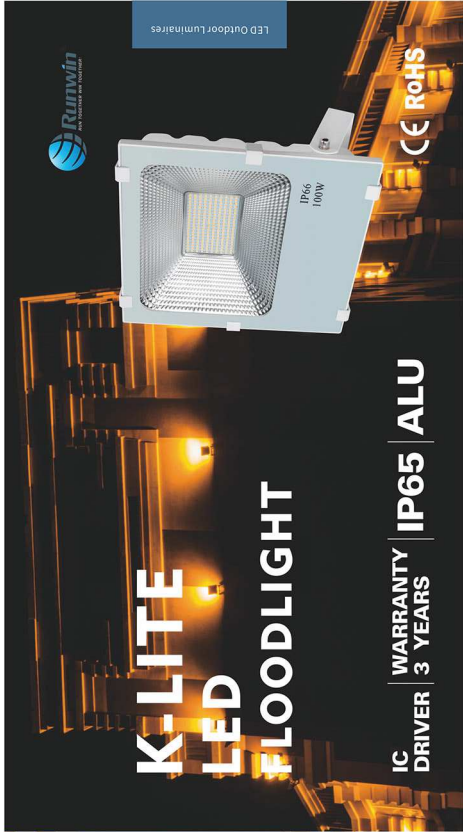

LED Outdoor Luminaires

K-LITE
LED
FLOODLIGHT

IC | WARRANTY 3 YEARS | IP65 | ALU

CE ROHS

Features:

- Die cast aluminum housing
- Elegant and strong design achieves high quality
- High quality reflector makes wide beam angle
- Reliable led chip with high lumen efficiency: >100lm/w
- Efficient led driver to achieve safe and guaranteed quality
- IP rating: IP65
- Suitable for project cases: stadium, hotel, warehouse, Etc.
- Long lifespan: 30000hours, 3 years warranty
- CE, ROHS approval



100LM/W

Technical Parameters:

Item No.	Voltage	Wattage	Luminous flux	CRI	Beam Angle	IP	PF	Product Size (L*W*H)
01FL-KL-10W	AC100-265V	10W	1000LM	>70	120°	65	0.5	131*112*45mm
01FL-KL-20W	AC100-265V	20W	2000LM	>70	120°	65	0.5	176*157*54mm
01FL-KL-30W	AC100-265V	30W	3000LM	>70	120°	65	0.9	192*172*54mm
01FL-KL-50W	AC100-265V	50W	5000LM	>70	120°	65	0.9	236*202*69mm
01FL-KL-100W	AC100-265V	100W	10000LM	>70	120°	65	0.9	272*252*83mm
01FL-KL-150W	AC100-265V	150W	15000LM	>70	120°	65	0.9	318*276*80mm
01FL-KL-200W	AC100-265V	200W	20000LM	>70	120°	65	0.9	459*330*177mm

B-LITE LED FLOODLIGHT

LED Outdoor Luminaires

IC DRIVER | WARRANTY 2 YEARS | IP65 ALU | CE ROHS

- 01** High quality diffuser for better beam angle
- 02** Air vents: with this air vent, when light is lighted, the air inside can be expelled to outside so as to avoid water vapor in the floodlight

- 03** With stainless steel screws and tempered glass, the floodlight is stronger in severe weather conditions
- 04** Full die cast aluminum housing for good heat dissipation; IP 65 Waterproof block; Stainless steel block with VDE 3x0,75mm² wires

Technical Parameters:

Item No.	Wattage	Voltage	Lumen	CRI	Beam angle	IP	PF	Product size (L*W*H)
01FL-BL-10W	10W	AC100-265V	850LM	>80	60°	65	>0.9	125*126*37mm
01FL-BL-20W	20W	AC100-265V	1700LM	>80	60°	65	>0.9	176*165*38mm
01FL-BL-30W	30W	AC100-265V	2550LM	>80	60°	65	>0.9	228*190*40mm
01FL-BL-50W	50W	AC100-265V	4250LM	>80	60°	65	>0.9	226*190*40mm
01FL-BL-100W	100W	AC100-265V	8500LM	>80	60°	65	>0.9	268*310*44.5mm
01FL-BL-150W	150W	AC100-265V	12750LM	>80	60°	65	>0.9	378*310*47.5mm
01FL-BL-200W	200W	AC100-265V	17000LM	>80	60°	65	>0.9	444*333*50mm

HAPPY BOY LED FLOODLIGHT

LED Outdoor Luminaires

AC/IC DRIVER | WARRANTY 2 YEARS | IP65 ALU | CE ROHS

- Features:**
 - Die cast aluminum housing
 - Ultra slim design to have elegant look.
 - High quality reflector to achieve wide beam angle
 - Reliable LED chip brand with high lumen efficiency
 - Efficient led driver to achieve safe and guaranteed quality
- IP rating: IP65
- With easy and quick installation, used in wide applications like stadium, hotel, advertisement, etc.
- Long lifespan; 25000 hours
- CE,ROHS approval

Technical Parameters:

Item No.	Voltage	Wattage	Luminous flux	CRI	Beam Angle	IP	PF	Product Size (L*W*H)
01FL-HB-10W-SMD	AC175-265V	10W	750LM	>80	120°	65	>0.5	111*84*41mm
01FL-HB-20W-SMD	AC175-265V	20W	1600LM	>80	120°	65	>0.5	181*139*41mm
01FL-HB-30W-SMD	AC175-265V	30W	2400LM	>80	120°	65	>0.9	224*165*56mm
01FL-HB-50W-SMD	AC175-265V	50W	4000LM	>80	120°	65	>0.9	285*229*76mm
01FL-HB-100W-SMD	AC175-265V	100W	7500LM	>80	120°	65	>0.9	285*335*75mm
01FL-HB-150W-SMD	AC175-265V	150W	11250LM	>80	120°	65	>0.9	325*422*85mm
01FL-HB-200W-SMD	AC175-265V	200W	15000LM	>80	120°	65	>0.9	325*425*100mm



LED PANEL LIGHT

Applications:

Office, supermarket, school, hospital, commercial and so on.

Product Features:


- Quality famous branded SMD chip, CRI>80/90, high luminous efficiency, stable performance to provide uniform & comfortable light layout.
- Patented frame design, streamlined structure, delicate finishing, compact and elegant.
- High-quality L.P.P. professional point laser design to ensure high lumen, comfortable and natural lighting.
- High-quality isolated constant current driver, Dimming, intelligent control function for options.
- Luminous decay less than 2% at 6,000 hours (ERP tested and approved), lifespan up to 35,000 hours.
- Serialized products, powers ranging from 18W-80W.
- Suspending, recessed, ceiling mounted, frame mounted for options.
- 2/3/5 years warranty for options.



LED PANEL LIGHT Frameless Series



AC 185-265V 50/60Hz	AC 185-265V 50/60Hz	CRI >80	CRI >90
3000K	4000K	6000K	



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size (mm)	Packing (LxWxH (mm))
02PAL-FRA-18W	18W	PureAlu+PMMA	1620lm	Suspending/ Surface/Recessed	300*300	5pcs/CTN13728*45
02PAL-FRA-24W	24W	PureAlu+PMMA	2160lm	Suspending/ Surface/Recessed	300*600	4pcs/CTN13723*75
02PAL-FRA-36W	36W	PureAlu+PMMA	3240lm	Suspending/ Surface/Recessed	600*600	4pcs/CTN16823*75
02PAL-FRA-40W	40W	PureAlu+PMMA	3600lm	Suspending/ Surface/Recessed	600*600	4pcs/CTN16823*75
02PAL-FRA-48W	48W	PureAlu+PMMA	4320lm	Suspending/ Surface/Recessed	600*600	4pcs/CTN16823*75
02PAL-FRA-36W	36W	PureAlu+PMMA	3240lm	Suspending/ Surface/Recessed	300*1200	4pcs/CTN12823*75
02PAL-FRA-40W	40W	PureAlu+PMMA	3600lm	Suspending/ Surface/Recessed	300*1200	4pcs/CTN12823*75
02PAL-FRA-48W	48W	PureAlu+PMMA	4320lm	Suspending/ Surface/Recessed	300*1200	4pcs/CTN12823*75




LED PANEL LIGHT ECO Series

LED Commercial Lighting



Ra80 | 80Lm/w

AC 185-260V 50/60Hz	AC 185-260V 50/60Hz	CRI >80
3000K	4000K	6000K



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Packing (LxWxH)(mm)
02PAL-ECO-24W	24W	Pure Alu+PS	1920lm	Suspending/Surface/ Recessed/Frame mounted	300*600	10pcs/CTN 685*360*400
02PAL-ECO-36W	36W	Pure Alu+PS	2880lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-ECO-40W	40W	Pure Alu+PS	3200lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-ECO-48W	48W	Pure Alu+PS	3840lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-ECO-36W	36W	Pure Alu+PS	2880lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-ECO-40W	40W	Pure Alu+PS	3200lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-ECO-48W	48W	Pure Alu+PS	3840lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-ECO-80W	80W	Pure Alu+PS	6400lm	Suspending/Surface/ Recessed/Frame mounted	600*1200	5pcs/CTN 1285*685*200




LED PANEL LIGHT High Efficiency Series

LED Commercial Lighting



130Lm/w

AC 185-260V 50/60Hz	AC 185-260V 50/60Hz	CRI >80
3000K	4000K	6000K



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Packing (LxWxH)(mm)
02PAL-CLD-24W	24W	Pure Alu+PMMA	3120lm	Suspending/Surface/ Recessed/Frame mounted	300*600	10pcs/CTN 685*360*400
02PAL-CLD-36W	36W	Pure Alu+PMMA	4680lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-CLD-40W	40W	Pure Alu+PMMA	5200lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-CLD-48W	48W	Pure Alu+PMMA	6240lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-CLD-36W	36W	Pure Alu+PMMA	3120lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-CLD-40W	40W	Pure Alu+PMMA	4680lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-CLD-48W	48W	Pure Alu+PMMA	5200lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-CLD-80W	80W	Pure Alu+PMMA	6240lm	Suspending/Surface/ Recessed/Frame mounted	600*1200	5pcs/CTN 1285*685*200




LED PANEL LIGHT UGR Series

LED Commercial Lighting



UGR<19

AC 185-265V 50/60Hz	AC 85-265V 50/60Hz	CRI >80
3000K	4000K	6000K



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Packing (LxWxH(mm))
02PAL-CLD-24W	24W	Pure Alu+Lens Plate	1920lm	Suspending/Surface/ Recessed/Frame mounted	300*600	10pcs/CTN 685*360*400
02PAL-CLD-36W	36W	Pure Alu+Lens Plate	2880lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-CLD-40W	40W	Pure Alu+Lens Plate	3200lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-CLD-48W	48W	Pure Alu+Lens Plate	3840lm	Suspending/Surface/ Recessed/Frame mounted	600*600	5pcs/CTN 685*655*200
02PAL-CLD-36W	36W	Pure Alu+Lens Plate	2880lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-CLD-40W	40W	Pure Alu+Lens Plate	3200lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-CLD-48W	48W	Pure Alu+Lens Plate	3840lm	Suspending/Surface/ Recessed/Frame mounted	300*1200	5pcs/CTN 1285*360*200
02PAL-CLD-80W	80W	Pure Alu+Lens Plate	6400lm	Suspending/Surface/ Recessed/Frame mounted	600*1200	5pcs/CTN 1285*665*200

61 www.runwin.com




LED PANEL LIGHT Brazil Series

LED Commercial Lighting

320*620/400*400/620*620/320*1220




AC 85-265V 50/60Hz	AC 85-265V 50/60Hz	CRI >80
3000K	4000K	6000K



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Packing (LxWxH(mm))
02PAL-BRZ-18W	18W	Pure Alu+PS	1350lm	Suspending/Surface/ Recessed	320*620	10pcs/CTN 705*380*400
02PAL-BRZ-32W	32W	Pure Alu+PS	2400lm	Suspending/Surface/ Recessed	320*620	10pcs/CTN 705*380*400
02PAL-BRZ-30W	30W	Pure Alu+PS	2250lm	Suspending/Surface/ Recessed	400*400	5pcs/CTN 480*480*200
02PAL-BRZ-36W	36W	Pure Alu+PS	2880lm	Suspending/Surface/ Recessed	620*620	5pcs/CTN 705*675*200
02PAL-BRZ-40W	40W	Pure Alu+PS	3200lm	Suspending/Surface/ Recessed	620*620	5pcs/CTN 705*675*200
02PAL-BRZ-48W	48W	Pure Alu+PS	3846lm	Suspending/Surface/ Recessed	620*620	5pcs/CTN 705*675*200
02PAL-BRZ-36W	36W	Pure Alu+PS	2880lm	Suspending/Surface/ Recessed	320*1220	5pcs/CTN 1305*360*200
02PAL-BRZ-40W	40W	Pure Alu+PS	3200lm	Suspending/Surface/ Recessed	320*1220	5pcs/CTN 1305*360*200
02PAL-BRZ-48W	48W	Pure Alu+PS	3846lm	Suspending/Surface/ Recessed	320*1220	5pcs/CTN 1305*360*200

62 www.runwin.com

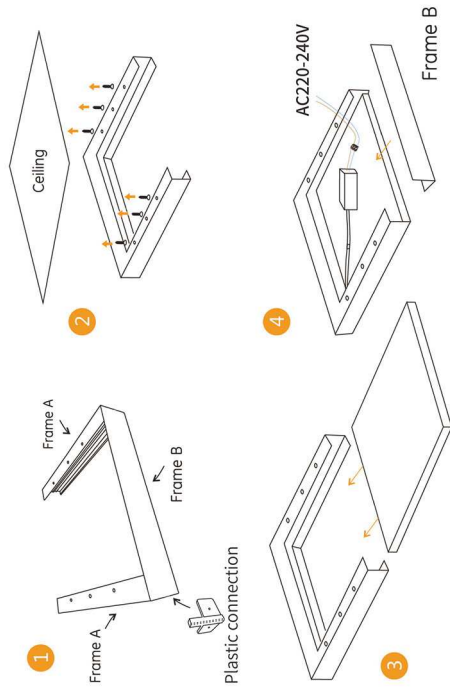

LED BRIGHT STAR PANEL SERIES

Applications:

Office, supermarket, school, hospital, commercial and so on.

Product Features:

- High quality performance, dimmable driver and undimmable driver for options. EPISTAR, SAN'AN and other famous brand LED chip to achieve high luminous efficiency, CRI>80 to provide uniform light layout.
- Patented frame design, stream-line structure, refined surface treatment, simple and elegant appearance.
- High-quality LGP, laser or silk print for luminous intensity distribution to ensure high lumen and comfortable natural lighting.
- Easy surface mounting, recessed mounting and suspending mounting.
- Lifespan up to 35000 hours, 2 years warranty.





AC 185-265V 50/60Hz	AC CRI >70	AC CRI >80	AC CRI >90
3000K	4000K	6000K	



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Cutout Size(mm)	Packing (LxWxH mm)
02PAL-STR-R3W	3W	Pure Alu+PS	140lm	Recessed	Ø85*17	Ø70	60pcs/CTN450*271*205
02PAL-STR-R6W	6W	Pure Alu+PS	320lm	Recessed	Ø120*20	Ø105	40pcs/CTN375*310*267
02PAL-STR-R9W	9W	Pure Alu+PS	620lm	Recessed	Ø145*20	Ø130	30pcs/CTN450*445*198
02PAL-STR-R12W	12W	Pure Alu+PS	840lm	Recessed	Ø170*20	Ø155	30pcs/CTN450*445*198
02PAL-STR-R15W	15W	Pure Alu+PS	1200lm	Recessed	Ø200*20	Ø180	20pcs/CTN565*310*238
02PAL-STR-R18W	18W	Pure Alu+PS	1440lm	Recessed	Ø225*20	Ø200	20pcs/CTN565*310*238
02PAL-STR-R24W	24W	Pure Alu+PS	1920lm	Recessed	Ø300*20	Ø280	20pcs/CTN590*315*265

AC 185-265V 50/60Hz	AC CRI >70	AC CRI >80	AC CRI >90
3000K	4000K	6000K	



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Cutout Size(mm)	Packing (LxWxH mm)
02PAL-STR-S3W	3W	Pure Alu+PS	140lm	Recessed	85*85*17	70*70	60pcs/CTN450*271*205
02PAL-STR-S6W	6W	Pure Alu+PS	320lm	Recessed	120*120*20	105*105	40pcs/CTN375*310*267
02PAL-STR-S9W	9W	Pure Alu+PS	620lm	Recessed	145*145*20	130*130	30pcs/CTN450*445*198
02PAL-STR-S12W	12W	Pure Alu+PS	840lm	Recessed	170*170*20	155*155	30pcs/CTN450*445*198
02PAL-STR-S15W	15W	Pure Alu+PS	1200lm	Recessed	200*200*20	180*180	20pcs/CTN565*310*238
02PAL-STR-S18W	18W	Pure Alu+PS	1440lm	Recessed	225*225*20	200*200	20pcs/CTN565*310*238
02PAL-STR-S24W	24W	Pure Alu+PS	1920lm	Recessed	300*300*20	280*280	20pcs/CTN590*315*265



AC 185-265V 50/60Hz	AC CRI >70	AC CRI >80	AC CRI >90
3000K	4000K	6000K	



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Cutout Size(mm)	Packing (LxWxH mm)
02PAL-STC-R6W	6W	Pure Alu+PS	300lm	Surface Mounting	Ø120*32	/	40pcs/CTN430*265*265
02PAL-STC-R12W	12W	Pure Alu+PS	780lm	Surface Mounting	Ø170*32	/	30pcs/CTN550*430*190
02PAL-STC-R18W	18W	Pure Alu+PS	1300lm	Surface Mounting	Ø225*32	/	20pcs/CTN470*430*240
02PAL-STC-R24W	24W	Pure Alu+PS	1800lm	Surface Mounting	Ø300*32	/	10pcs/CTN430*320*320

AC 185-265V 50/60Hz	AC CRI >70	AC CRI >80	AC CRI >90
3000K	4000K	6000K	



Item No.	Power	Material	Luminous Flux(lm)	Mounting	Product Size(mm)	Cutout Size(mm)	Packing (LxWxH mm)
02PAL-STC-S6W	6W	Pure Alu+PS	300lm	Surface Mounting	120*120*32	/	40pcs/CTN430*265*265
02PAL-STC-S12W	12W	Pure Alu+PS	780lm	Surface Mounting	170*170*32	/	30pcs/CTN550*430*190
02PAL-STC-S18W	18W	Pure Alu+PS	1300lm	Surface Mounting	225*225*32	/	20pcs/CTN470*430*240
02PAL-STC-S24W	24W	Pure Alu+PS	1800lm	Surface Mounting	300*300*32	/	10pcs/CTN430*320*320



LED Commercial Lighting

LED Commercial Lighting

LED PANNEL LIGHT SMART MOUNTED

Applications:

Residential, club, office, store, supermarket, school, hospital, commercial and etc.

Product Features:

- Easy installation, convertible mounted for recessed and ceiling.
- Quality famous branded SMD chip, stable performance to provide uniform & comfortable light layout.
- High quality LGP, professional point laser design to ensure high lumen, comfortable and natural lighting.
- Accurate light distribution control, pure light spot, anti-glare tech, comfort and non-glare lighting effect.
- Serialized products, powers ranging from 6W-24W.
- 2 years warranty.



Item No.	Power	Voltage	Material	Luminous Flux(lm)	PF	CRI	Beam angle	Product Size (mm)
02PAL-RW02-R6W	6W	AC175-265V	Al+PPT+PS	360lm	0.9	80	120°	Ø118*20
02PAL-RW02-R12W	12W	AC175-265V	Al+PPT+PS	960lm	0.9	80	120°	Ø170*20
02PAL-RW02-R18W	18W	AC175-265V	Al+PPT+PS	1440lm	0.9	80	120°	Ø223*20
02PAL-RW02-R24W	24W	AC175-265V	Al+PPT+PS	1920lm	0.9	80	120°	Ø300*20



LED PANNEL LIGHT INTERGRATED SERIES

Applications:


Residential, club, office, store, supermarket, school, hospital, commercial and etc.

Product Features:

- Quality famous branded SMD chip, high luminous efficiency, stable performance to provide uniform & comfortable light layout.
- High quality LGP, professional point laser design to ensure high lumen, comfortable and natural lighting.
- Accurate light distribution control, pure light spot, anti-glare tech, comfort and non-glare lighting effect.
- Serialized products, powers ranging from 6W-24W.
- 2 years warranty.



Item No.	Power	Voltage	Material	Luminous Flux(lm)	PF	CRI	Beam angle	Product Size (mm)
02PAL-RW03-R3W	3W	AC175-265V	PC+PS	220lm	0.9	80	120°	Ø 87*30
02PAL-RW03-R6W	6W	AC175-265V	PC+PS	450lm	0.9	80	120°	Ø108*30
02PAL-RW03-R9W	9W	AC175-265V	PC+PS	720lm	0.9	80	120°	Ø148*30
02PAL-RW03-R12W	12W	AC175-265V	PC+PS	960lm	0.9	80	120°	Ø168*30
02PAL-RW03-R15W	15W	AC175-265V	PC+PS	1200lm	0.9	80	120°	Ø197*30
02PAL-RW03-R18W	18W	AC175-265V	PC+PS	1800lm	0.9	80	120°	Ø222*30
02PAL-RW03-R24W	24W	AC175-265V	PC+PS	2400lm	0.9	80	120°	Ø296*30

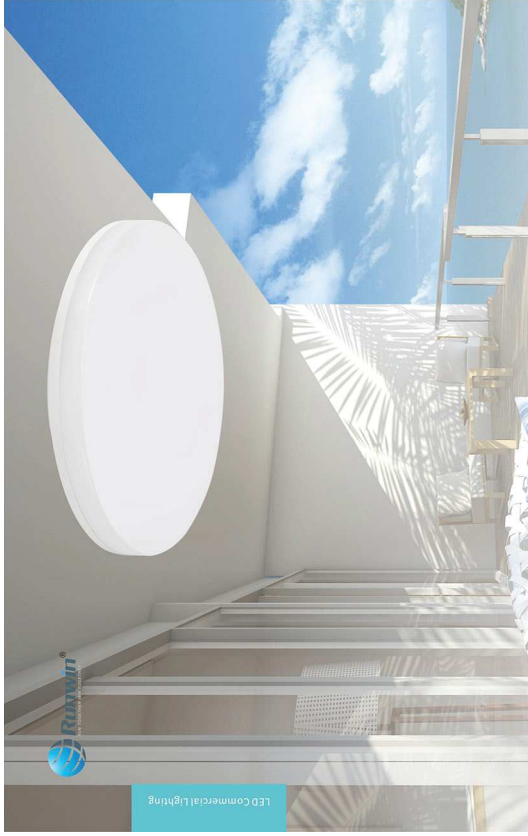

LED Commercial Lighting

LED CEILING LIGHT Ultrathin Waterproof Series



LED Commercial Lighting

IP54



Item No.	Power	Voltage	Material	Luminous Flux(lm)	PF	RA	Beam angle	IP	Product Size (mm)
02CL-RW-R01-12W	12W	AC175-265V	PC-PC	1200lm	0.9	80	120°	54	Ø220*H48
02CL-RW-R01-18W	18W	AC175-265V	PC-PC	1800lm	0.9	80	120°	54	Ø280*H48
02CL-RW-R01-24W	24W	AC175-265V	PC-PC	2400lm	0.9	80	120°	54	Ø330*H48

LED CEILING LIGHT

Applications:

Hotel, residential, and commercial places, etc

Product Features:

- With internal power supply and no dark space on acrylic cover.
- High Lumens, high brightness.
- Low power consumption, high intensity, low lumen attenuation.
- Optimized heat sink design to ensure a excellent heat dissipation system.
- Accurate light distribution control, pure light spot, anti-glare tech, comfort and non-glare lighting effect.
- Easy installation and ultra energy efficient, can directly replace incandescent/halogen lamp.
- Serialized products, powers ranging from 12W-24W.
- 2 years warranty.



73 www.runwin.com



IP54



Item No.	Power	Voltage	Material	Luminous Flux(lm)	PF	RA	Beam angle	IP	Product Size (mm)
02CL-RW-S01-12W	12W	AC175-265V	PC-PC	1200lm	0.9	80	120°	54	220*220*48
02CL-RW-S01-18W	18W	AC175-265V	PC-PC	1800lm	0.9	80	120°	54	280*280*48
02CL-RW-S01-24W	24W	AC175-265V	PC-PC	2400lm	0.9	80	120°	54	330*330*48

www.runwin.com 74



T8 LED GLASS TUBE


Selling points:

- Material: Full glass tube same as traditional fluorescent tube
- Lumen output : High lumen efficiency >80lm/w
- Led chip: equipped with famous domestic led chip brand Samart® with SMD solution
- Driver: constant current driver to ensure good performance of luminous flux and long-time lifespan.
- Safer transportation: whole glass tube is covered with milky film to protect it from broken during transportation.
- Both single and double ended installation ways are available.
- Lifespan: 25000 hours
- CE, RoHS appliance.

RW-T8-45-9W-G RW-T8-60-9W-G RW-T8-120-14W-G RW-T8-120-18W-G RW-T8-150-24W-G

W	6W	9W	14W	18W	24W		Full Glass		-20°C~45°C
						270°			
						25000H	PF	0.9	
						2700~6500K			IP20
						80			
Size	450mm(6W)		600mm(9W)		900mm(14W)	1200mm(18W)	1500mm(24W)		
LM	550lm(6W)		850lm(9W)		1200lm(14W)	1700lm(18W)	2100lm(24W)		

Double-powered LED Tube T8's replacement step for lamp bracket of inductive ballast

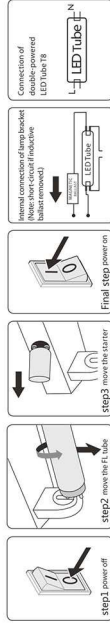

Single-powered LED Tube T8's replacement step for lamp bracket of inductive ballast

